



IBM Informix
Version 3.70

*IBM Informix Embedded SQLJ User's
Guide*



IBM Informix
Version 3.70

*IBM Informix Embedded SQLJ User's
Guide*



Note:

Before using this information and the product it supports, read the information in "Notices" on page D-1.

This document contains proprietary information of IBM. It is provided under a license agreement and is protected by copyright law. The information contained in this publication does not include any product warranties, and any statements provided in this manual should not be interpreted as such.

When you send information to IBM, you grant IBM a nonexclusive right to use or distribute the information in any way it believes appropriate without incurring any obligation to you.

© Copyright IBM Corporation 1996, 2010.

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

Contents

Introduction	v
In This Introduction	v
About This Publication	v
Types of Users.	v
Software Dependencies	vi
Global Language Support.	vi
Example Code Conventions	vi
Additional Documentation	vi
Compliance with Industry Standards.	vii
How to Provide Documentation Feedback	vii
Chapter 1. Introducing IBM Informix Embedded SQLJ	1-1
In This Chapter.	1-1
What Is Embedded SQLJ?	1-1
How Does Embedded SQLJ Work?	1-1
Embedded SQLJ Versus JDBC	1-2
Chapter 2. Preparing to Use Embedded SQLJ.	2-1
In This Chapter.	2-1
What Components Do You Need?	2-1
Setting Up Your Software	2-1
Examples	2-1
Chapter 3. Building an Embedded SQLJ Program	3-1
In This Chapter.	3-1
Fundamentals of Embedded SQLJ	3-1
SQLJ Statement Identifier	3-1
Connecting to a Database	3-1
Embedding SQL Statements.	3-2
Handling Result Sets	3-2
A Simple Embedded SQLJ Program	3-3
Chapter 4. The Embedded SQLJ Language.	4-1
In This Chapter.	4-1
Embedded SQLJ Versus Traditional Embedded SQL	4-1
Embedded SQLJ Source Files	4-2
Identifying Embedded SQLJ Statements.	4-2
SQL Statements	4-2
Host Variables	4-3
SELECT Statements That Return a Single Row	4-3
Handling Result Sets	4-3
Positional Iterators.	4-3
Named Iterators	4-4
Using Column Aliases	4-5
Iterator Methods	4-5
Positioned Updates and Deletes	4-6
Monitoring the Execution of an SQL Query	4-6
Calling SPL Routines and Functions	4-7
SQL and Java Type Mappings	4-7
Language Character Sets.	4-9
Importing Java Packages.	4-9
SQLJ Reserved Names	4-10
Parameter, Field, and Variable Names	4-10
Class Names and Filenames	4-10

Handling Errors	4-10
Chapter 5. Processing Embedded SQLJ Source Code	5-1
In This Chapter	5-1
Translating, Compiling, and Running Embedded SQLJ Programs	5-1
The ifxsqlj Command	5-2
Command Options	5-2
Basic Options	5-3
Advanced Options	5-4
Setting Options	5-7
Setting Options on the Command Line	5-7
Supplying Options in Property Files	5-7
Online Checking	5-8
Setting the -user and -password Options	5-9
Setting the -url and -driver Options	5-9
The ifxprof Tool	5-9
Appendix A. Connecting to Databases.	A-1
The ConnectionManager Class	A-1
Database URLs	A-1
Using Nondefault Connection Contexts	A-2
MultiConnect.sqlj	A-3
Appendix B. Sample Programs	B-1
Appendix C. Accessibility	C-1
Accessibility features for IBM Informix	C-1
Accessibility Features	C-1
Keyboard Navigation	C-1
Related Accessibility Information	C-1
IBM and Accessibility	C-1
Notices	D-1
Trademarks	D-3
Index	X-1

Introduction

In This Introduction	v
About This Publication	v
Types of Users.	v
Software Dependencies	vi
Global Language Support.	vi
Example Code Conventions	vi
Additional Documentation	vi
Compliance with Industry Standards.	vii
How to Provide Documentation Feedback	vii

In This Introduction

This introduction provides an overview of the information in this manual and describes the conventions it uses.

About This Publication

This publication contains information about using IBM Informix Embedded SQLJ. This section discusses the intended audience and the associated software products that you must have to use IBM Informix Embedded SQLJ.

New editions and product names:

Dynamic Server editions were withdrawn and new Informix® editions are available. Some products were also renamed. The publications in the Informix library pertain to the following products:

- IBM® Informix database server, formerly known as IBM Informix Dynamic Server (IDS)
- IBM Informix OpenAdmin Tool for Informix, formerly known as OpenAdmin Tool for Informix Dynamic Server (IDS)
- IBM Informix SQL Warehousing Tool, formerly known as Informix Warehouse Feature

For more information about the Informix product family, go to <http://www.ibm.com/software/data/informix/>.

Types of Users

This guide is for programmers who want to write Java programs that can:

- Connect to Informix databases.
- Issue SQL statements to manipulate data in the database.

This manual is written with the assumption that you have the following background:

- A working knowledge of your computer, your operating system, and the utilities that your operating system provides
- Experience with the Java programming language
- Experience working with relational databases or exposure to database concepts
- Experience with the SQL query language

If you have limited experience with relational databases, SQL, or your operating system, refer to the *IBM Informix Getting Started Guide* for your database server for a list of supplementary titles.

Software Dependencies

To run IBM Informix Embedded SQLJ programs, you must use one of the following database servers:

- IBM Informix, Version 11.10 and later
- IBM Informix Extended Parallel Server, Version 8.x

To enable your programs to connect to the server, you must use IBM Informix JDBC Driver, Version 3.50 or later.

To create your programs, you must use the JavaSoft software Java Development Kit (JDK), Version 1.4.2 or later, or any Java software compatible with JDK 1.4.2.

Global Language Support

Refer to the *IBM Informix JDBC Driver Programmer's Guide* for information about using Global Language Support (GLS) with IBM Informix JDBC Driver.

Example Code Conventions

Examples of SQL code occur throughout this publication. Except as noted, the code is not specific to any single IBM Informix application development tool.

If only SQL statements are listed in the example, they are not delimited by semicolons. For instance, you might see the code in the following example:

```
CONNECT TO stores_demo
...

DELETE FROM customer
  WHERE customer_num = 121
...

COMMIT WORK
DISCONNECT CURRENT
```

To use this SQL code for a specific product, you must apply the syntax rules for that product. For example, if you are using an SQL API, you must use EXEC SQL at the start of each statement and a semicolon (or other appropriate delimiter) at the end of the statement. If you are using DB-Access, you must delimit multiple statements with semicolons.

Tip: Ellipsis points in a code example indicate that more code would be added in a full application, but it is not necessary to show it to describe the concept being discussed.

For detailed directions on using SQL statements for a particular application development tool or SQL API, see the documentation for your product.

Additional Documentation

Documentation about this release of IBM Informix products is available in various formats.

All of the product documentation (including release notes, machine notes, and documentation notes) is available from the information center on the Web at <http://publib.boulder.ibm.com/infocenter/idshelp/v117/index.jsp>. Alternatively, you can access or install the product documentation from the Quick Start CD that is shipped with the product.

Compliance with Industry Standards

IBM Informix products are compliant with various standards.

The American National Standards Institute (ANSI) and the International Organization of Standardization (ISO) have jointly established a set of industry standards for the Structured Query Language (SQL). IBM Informix SQL-based products are fully compliant with SQL-92 Entry Level (published as ANSI X3.135-1992), which is identical to ISO 9075:1992. In addition, many features of IBM Informix database servers comply with the SQL-92 Intermediate and Full Level and X/Open SQL Common Applications Environment (CAE) standards.

How to Provide Documentation Feedback

You are encouraged to send your comments about IBM Informix user documentation.

Use one of the following methods:

- Send e-mail to docinf@us.ibm.com.
- Go to the information center at <http://publib.boulder.ibm.com/infocenter/idshelp/v117/index.jsp> and open the topic that you want to comment on. Click the feedback link at the bottom of the page, fill out the form, and submit your feedback.
- Add comments to topics directly in the Informix information center and read comments that were added by other users. Share information about the product documentation, participate in discussions with other users, rate topics, and more! Find out more at <http://publib.boulder.ibm.com/infocenter/idshelp/v117/topic/com.ibm.start.doc/contributing.htm>.

Feedback from all methods is monitored by those who maintain the user documentation. The feedback methods are reserved for reporting errors and omissions in our documentation. For immediate help with a technical problem, contact IBM Technical Support. For instructions, see the IBM Informix Technical Support website at <http://www.ibm.com/planetwide/>.

We appreciate your suggestions.

Chapter 1. Introducing IBM Informix Embedded SQLJ

In This Chapter	1-1
What Is Embedded SQLJ?	1-1
How Does Embedded SQLJ Work?	1-1
Embedded SQLJ Versus JDBC	1-2

In This Chapter

This chapter explains what IBM Informix Embedded SQLJ allows you to do and provides an overview of how it works.

What Is Embedded SQLJ?

IBM Informix Embedded SQLJ enables you to embed SQL statements in your Java programs. IBM Informix Embedded SQLJ consists of:

- The SQLJ translator, which translates SQLJ code into Java code
- A set of Java classes that provide runtime support for SQLJ programs

IBM Informix Embedded SQLJ includes the standard SQLJ implementation, as defined by the SQLJ consortium, plus specific Informix extensions. The rest of this manual refers to IBM Informix Embedded SQLJ as *Embedded SQLJ*. The standard SQLJ implementation is referred to as *traditional Embedded SQLJ*.

How Does Embedded SQLJ Work?

When you use Embedded SQLJ, you embed SQL statements in your Java source code. You use the SQLJ translator to convert the embedded SQL statements to Java source code with calls to JDBC. JDBC is the JavaSoft specification of a standard application programming interface (API) that allows Java programs to access database management systems.

Finally, you use the Java compiler to compile your translated Java program into an executable Java `.class` file, as shown in Figure 1-1.

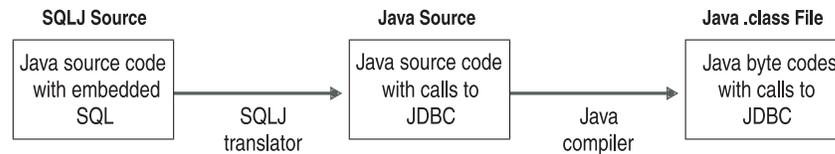


Figure 1-1. Translation and Compilation of an Embedded SQLJ Program

When you run your program, it uses the IBM Informix JDBC Driver to connect to an Informix database, as shown in Figure 1-2.

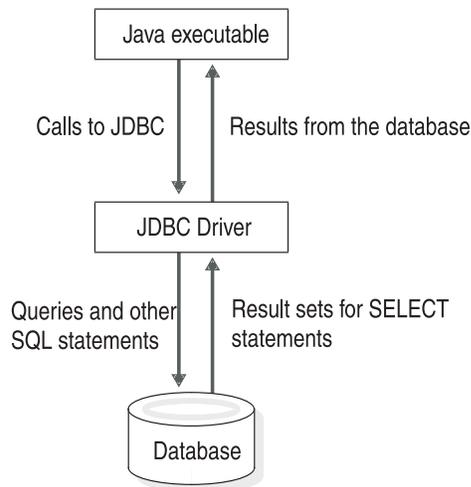


Figure 1-2. Runtime Architecture for Embedded SQLJ Programs

See the *IBM Informix JDBC Driver Programmer's Guide* for information about using the IBM Informix JDBC Driver.

Embedded SQLJ Versus JDBC

Embedded SQLJ does not support dynamic SQL; you must use the JDBC API if you want to use dynamic SQL. Your Embedded SQLJ program can call the JDBC API to perform a dynamic operation (the SQLJ connection-context object that you use to connect an Embedded SQLJ program to the database contains a JDBC **Connection** object that you can use to create JDBC statement objects).

If you are using static SQL, Embedded SQLJ provides the following advantages:

- **Default connection context.** You only need to set the default connection context once within a program; then every subsequent Embedded SQLJ statement uses this connection context unless you specify otherwise.
- **Reduced statement complexity.** For example, you do not need to explicitly bind each variable; Embedded SQLJ performs binding for you. Generally, this feature allows you to create smaller programs than with the JDBC API.
- **Compile-time syntax and semantics checking.** The Embedded SQLJ translator checks the syntax of SQL statements.
- **Compile-time type checking.** The Embedded SQLJ translator and the Java compiler check that the Java data types of arguments are compatible with the SQL data types of the SQL operation.
- **Compile-time schema checking.** You can connect to a sample database schema during translation to check that your program uses valid SQL statements for the tables, views, columns, stored procedures, and so on in your sample.

Chapter 2. Preparing to Use Embedded SQLJ

In This Chapter	2-1
What Components Do You Need?	2-1
Setting Up Your Software	2-1
Examples	2-1

In This Chapter

This chapter describes the software you must have to develop Embedded SQLJ programs and how to set up this software.

What Components Do You Need?

You need the following software to create and run SQLJ programs:

- IBM Informix Embedded SQLJ
- To create your programs, you must use the JavaSoft software Java Development Kit (JDK), Version 1.4.2 or later, or any Java software compatible with JDK 1.4.2.
- IBM Informix JDBC Driver, Version 3.50 or later, to enable your programs to connect to the database server
- One of the following Informix database servers:
 - IBM Informix, Version 11.10 and later
 - IBM Informix Extended Parallel Server, Version 8.x

Setting Up Your Software

Before you install Embedded SQLJ, you must already have installed the JavaSoft software Java Development Kit (JDK), Version 1.4.2 or later, or any Java software compatible with JDK 1.4.2. For more information about the Java language, see the JavaSoft Web site at <http://www.oracle.com/technetwork/java/index.html>

For further information about installing and using IBM Informix JDBC Driver, see the *IBM Informix JDBC Driver Programmer's Guide*.

If you do not already have your Informix server installed, refer to the *IBM Informix Installation Guide* that accompanies that software.

Examples

IBM Informix Embedded SQLJ includes sample online programs in the `/demo/sqlj` directory. The README file in this directory briefly explains what each of the programs demonstrates and how to set up, compile, and run the programs. The programs also enable you to verify that IBM Informix Embedded SQLJ and IBM Informix JDBC Driver are correctly installed. The examples in this manual are taken from these sample programs.

Chapter 3. Building an Embedded SQLJ Program

In This Chapter	3-1
Fundamentals of Embedded SQLJ	3-1
SQLJ Statement Identifier	3-1
Connecting to a Database	3-1
Embedding SQL Statements.	3-2
Handling Result Sets	3-2
Positional Iterators.	3-3
Named Iterators	3-3
A Simple Embedded SQLJ Program	3-3

In This Chapter

This chapter explains the fundamentals of building an Embedded SQLJ program and includes a demonstration program.

Fundamentals of Embedded SQLJ

This chapter introduces simple Embedded SQLJ statements; see Chapter 4, “The Embedded SQLJ Language,” on page 4-1, for detailed information about the language.

SQLJ Statement Identifier

Each SQLJ statement in an Embedded SQLJ program is identified by `#sql` at the beginning of the statement. The SQLJ translator recognizes `#sql` and translates the rest of the statement into Java code using JDBC calls.

Connecting to a Database

You can use a class called `ConnectionManager` (located in a file in the `/demo/sqlj` directory) to initiate a JDBC connection. The `ConnectionManager` class uses a JDBC driver and a database URL to connect to a database. Database URLs are described in “Database URLs” on page A-1.

To enable your Embedded SQLJ program to connect to a database, you assign values to the following data members of the `ConnectionManager` class in the file `/demo/sqlj/ConnectionManager.java`:

Member	Description
UID	The user name
PWD	The password for the user name
DRIVER	The JDBC driver
DBURL	The URL for the database

You must include the directory that contains your `ConnectionManager.class` file (produced when you compile `ConnectionManager.java`) in your `CLASSPATH` environment variable definition.

Your Embedded SQLJ program connects to the database by calling the `initContext()` method of the `ConnectionManager` class, as follows:

```
ConnectionManager.initContext();
```

“The ConnectionManager Class” on page A-1 provides details about the functionality of the `initContext()` method.

As an alternative to using the `ConnectionManager` class, you can write your own input methods to read the values of user name, password, driver, and database URL from a file or from the command line.

The connection context that you set up is the *default* connection context; all `#sql` statements execute within this context, unless you specify a different context. For information about using nondefault connection contexts, see “Using Nondefault Connection Contexts” on page A-2.

Embedding SQL Statements

Embedded SQL statements can appear anywhere that Java statements can legally appear. SQL statements must appear within curly braces, as follows:

```
#sql
{
INSERT INTO customer VALUES
( 101, "Ludwig", "Pauli", "All Sports Supplies",
"213 Erstwild Court", "", "Sunnyvale", "CA",
"94086", "408-789-8075"
)
};
```

You can use the `SELECT...INTO` statement to retrieve data into Java variables (*host variables*). Host variables within SQL statements are designated by a preceding colon (:). For example, the following query places values in the variables `customer_num`, `fname`, `lname`, `company`, `address1`, `address2`, `city`, `state`, `zipcode`, and `phone`:

```
#sql
{
SELECT * INTO :customer_num, :fname, :lname, :company,
:address1, :address2, :city, :state, :zipcode,
:phone
FROM customer
WHERE customer_num = 101
};
```

SQL statements are case insensitive and can be written in uppercase, lowercase, or mixed-case letters. Java statements are case sensitive (and so are host variables).

You use `SELECT...INTO` statements for queries that return a single record; for queries that return multiple rows (a *result set*), you use an iterator object, described in the next section.

Handling Result Sets

Embedded SQLJ uses result-set iterator objects rather than cursors to manage result sets (cursors are used by languages such as IBM Informix ESQL/C). A result-set iterator is a Java object from which you can retrieve the data returned by a `SELECT` statement. Unlike cursors, iterator objects can be passed as parameters to a method.

Important: Names of iterator classes must be unique within an application.

When you declare an iterator class, you specify a set of Java variables to match the SQL columns that your `SELECT` statement returns. There are two types of iterators: positional and named.

Positional Iterators

The order of declaration of the Java variables of a positional iterator must match the order in which the SQL columns are returned. You use a `FETCH...INTO` statement to retrieve data from a positional iterator.

For example, the following statement generates a positional iterator class with five columns, called **CustIter**:

```
#sql iterator CustIter( int , String, String, String, String, String );
```

This iterator can hold the result set from the following `SELECT` statement:

```
SELECT customer_num, fname, lname, address1,  
address2, phone  
FROM customer
```

Named Iterators

The name of each Java variable of a named iterator must match the name of a column returned by your `SELECT` statement; order is irrelevant. The matching of SQL column name and iterator column name is case insensitive.

You use accessor methods of the same name as each iterator column to obtain the returned data, as shown in the example in “A Simple Embedded SQLJ Program” on page 3-3. The SQLJ translator uses the iterator column names to create accessor methods. Iterator column names are case sensitive; therefore, you must use the correct case when you specify an accessor method.

You cannot use the `FETCH...INTO` statement with named iterators.

For example, the following statement generates a named iterator class called **CustRec**:

```
#sql iterator CustRec(  
int customer_num,  
String fname,  
String lname ,  
String company ,  
String address1 ,  
String address2 ,  
String city ,  
String state ,  
String zipcode ,  
String phone  
);
```

This iterator class can hold the result set of any query that returns the columns defined in the iterator class. The result set from the query can have more columns than the iterator class, but the iterator class cannot have more columns than the result set. For example, this iterator class can hold the result set of the following query because the iterator columns include all of the columns in the **customer** table:

```
SELECT * FROM customer
```

A Simple Embedded SQLJ Program

This sample program, **Demo03.sqlj**, demonstrates the use of a named iterator to retrieve data from a database. This simple program outlines a standard sequence for many Embedded SQLJ programs:

1. Import necessary Java classes.
2. Declare an iterator class.

3. Define the **main()** method.
All Java applications have a method called **main**, which is the entry point for the application (where the interpreter starts executing the program).
4. Connect to the database.
The constructor of the application makes the connection to the database by calling the **initContext()** method of the **ConnectionManager** class.
5. Run queries.
6. Create an iterator object and populate it by running a query.
7. Handle the results.
8. Close the iterator.

```

/*****
 *
 *          IBM CORPORATION
 *
 *          PROPRIETARY DATA
 *
 * THIS DOCUMENT CONTAINS TRADE SECRET DATA WHICH IS THE PROPERTY OF
 * IBM CORPORATION. THIS DOCUMENT IS SUBMITTED TO RECIPIENT IN
 * CONFIDENCE. INFORMATION CONTAINED HEREIN MAY NOT BE USED, COPIED OR
 * DISCLOSED IN WHOLE OR IN PART EXCEPT AS PERMITTED BY WRITTEN AGREEMENT
 * SIGNED BY AN OFFICER OF IBM CORPORATION.
 *
 * THIS MATERIAL IS ALSO COPYRIGHTED AS AN UNPUBLISHED WORK UNDER
 * SECTIONS 104 AND 408 OF TITLE 17 OF THE UNITED STATES CODE.
 * UNAUTHORIZED USE, COPYING OR OTHER REPRODUCTION IS PROHIBITED BY LAW.
 *
 * Title:      Demo03.sqlj
 *
 * Description: This demonstrates simple iterator use
 *
 *
 *****/
import java.sql.*;
import sqlj.runtime.*; //SQLJ runtime classes

#sql iterator CustRec(
    int    customer_num,
    String fname,
    String lname ,
    String company ,
    String address1 ,
    String address2 ,
    String city ,
    String state ,
    String zipcode ,
    String phone
);

public class Demo03
{
    public static void main (String args[]) throws SQLException
    {
        Demo03 demo03 = new Demo03();
        try
        {
            demo03.runDemo();
        }
        catch (SQLException s)
        {
            System.err.println( "Error running demo program: " + s );
            System.err.println( "Error Code           : " +
                s.getErrorCode());
            System.err.println( "Error Message      : " +
                s.getMessage());
        }
    }
}

```

```

}

// Initialize database connection thru Connection Manager
Demo03()
{
    ConnectionManager.initContext();
}
void runDemo() throws SQLException
{
    drop_db();

    #sql { CREATE DATABASE demo_sqlj WITH LOG MODE ANSI };

    #sql
    {
        create table customer
        (
            customer_num        serial(101),
            fname                char(15),
            lname                char(15),
            company              char(20),
            address1             char(20),
            address2             char(20),
            city                  char(15),
            state                 char(2),
            zipcode              char(5),
            phone                 char(18),
            primary key (customer_num)
        )
    };

    // Insert 4 Records in a try block
    try
    {
        #sql
        {
            INSERT INTO customer VALUES
            ( 101, "Ludwig", "Pauli", "All Sports Supplies",
              "213 Erstwild Court", "", "Sunnyvale", "CA",
              "94086", "408-789-8075"
            )
        };

        #sql
        {
            INSERT INTO customer VALUES
            ( 102, "Carole", "Sadler", "Sports Spot",
              "785 Geary St", "", "San Francisco", "CA",
              "94117", "415-822-1289"
            )
        };

        #sql
        {
            INSERT INTO customer VALUES
            ( 103, "Philip", "Currie", "Phil's Sports",
              "654 Poplar", "P. O. Box 3498", "Palo Alto",
              "CA", "94303", "415-328-4543"
            )
        };

        #sql
        {
            INSERT INTO customer VALUES
            ( 104, "Anthony", "Higgins", "Play Ball!",
              "East Shopping Cntr.", "422 Bay Road", "Redwood City",
              "CA", "94026", "415-368-1100"
            )
        };
    }
}

```

```

catch (SQLException e)
{
    System.out.println("INSERT Exception: " + e + "\n");
    System.out.println("Error Code           : " +
        e.getErrorCode());
    System.err.println("Error Message      : " +
        e.getMessage());
}

System.out.println();
System.out.println("Running demo program Demo03...." );
System.out.println();

// Declare Iterator of type CustRec
CustRec cust_rec;

#sql cust_rec = { SELECT * FROM customer };

int row_cnt = 0;
while ( cust_rec.next() )
{
    System.out.println("=====");
    System.out.println("CUSTOMER NUMBER : " + cust_rec.customer_num());
    System.out.println("FIRST NAME      : " + cust_rec.fname());
    System.out.println("LAST NAME       : " + cust_rec.lname());
    System.out.println("COMPANY         : " + cust_rec.company());
    System.out.println("ADDRESS        : " + cust_rec.address1() + "\n" +
        "                " + cust_rec.address2());

    System.out.println("CITY           : " + cust_rec.city());
    System.out.println("STATE          : " + cust_rec.state());
    System.out.println("ZIPCODE        : " + cust_rec.zipcode());
    System.out.println("PHONE          : " + cust_rec.phone());
    System.out.println("=====");
    System.out.println("\n\n");
    row_cnt++;
}
System.out.println("Total No Of rows Selected : " + row_cnt);
cust_rec.close() ;
System.out.println("\n\n\n\n\n");

drop_db();
}
void drop_db() throws SQLException
{
    try
    {
        #sql { drop database demo_sqlj };
    }
    catch (SQLException s) { }
}
}

```

Chapter 4. The Embedded SQLJ Language

In This Chapter	4-1
Embedded SQLJ Versus Traditional Embedded SQL	4-1
Embedded SQLJ Source Files	4-2
Identifying Embedded SQLJ Statements.	4-2
SQL Statements	4-2
Host Variables	4-3
SELECT Statements That Return a Single Row	4-3
Handling Result Sets	4-3
Positional Iterators.	4-3
Named Iterators	4-4
Using Column Aliases	4-5
Iterator Methods	4-5
Positioned Updates and Deletes	4-6
Monitoring the Execution of an SQL Query	4-6
Calling SPL Routines and Functions	4-7
SQL and Java Type Mappings	4-7
Language Character Sets.	4-9
Importing Java Packages.	4-9
SQLJ Reserved Names	4-10
Parameter, Field, and Variable Names	4-10
Class Names and Filenames	4-10
Handling Errors	4-10

In This Chapter

This chapter provides detailed information about using the Embedded SQLJ language. For syntax and reference information about specific statements, refer to the *IBM Informix Guide to SQL: Syntax*.

Embedded SQLJ Versus Traditional Embedded SQL

Embedded SQLJ has some differences from the earlier embedded SQL languages defined by ANSI/ISO: ESQL/C, ESQL/ADA, ESQL/FORTRAN, ESQL/COBOL, and ESQL/PL/1. The major differences are as follows:

- The SQL connection statement of traditional embedded SQL is replaced by a Java connection-context object. This approach enables Embedded SQLJ programs to open multiple database connections simultaneously.
- In Embedded SQLJ there is no host variable definition section (preceded by a BEGIN DECLARE SECTION statement and terminated by an END DECLARE SECTION statement). All legal Java variables can be used as host variables.
- Embedded SQLJ does not include the WHENEVER...GOTO/CONTINUE statement, because Java has well-developed rules for declaring and handling exceptions.
- Embedded SQLJ uses iterator objects rather than cursors to manage result sets. A result-set iterator is a Java object from which you can retrieve the data returned by a SELECT statement. Unlike cursors, iterator objects can be passed as parameters to methods.
- Embedded SQLJ supports access to data in columns of iterator objects by name, through generated accessor methods. You can also access this data by position using the FETCH...INTO statement, as used by traditional embedded SQL.

- Unlike other host languages, Java allows null data. Therefore, you do not need to use null indicator variables with Embedded SQLJ.
- Embedded SQLJ does not include dynamic SQL; you must use JDBC instead.

The rest of this chapter describes how to use the Embedded SQLJ language.

Embedded SQLJ Source Files

The files containing your Embedded SQLJ source code must have the extension `.sqlj`; for example, `custapp.sqlj`.

Identifying Embedded SQLJ Statements

To identify Embedded SQLJ statements to the SQLJ translator, each SQLJ statement must begin with `#sql`. The SQLJ translator recognizes `#sql` and translates the statement into Java code.

SQL Statements

Embedded SQLJ supports SQL statements at the SQL92 Entry level, with the following additions:

- The EXECUTE PROCEDURE statement, for calling SPL routines and user-defined routines
- The EXECUTE FUNCTION statement, for calling stored functions
- The BEGIN...END block

SQL statements must appear within curly braces, as follows:

```
#sql
{
create table customer
(
customer_num          serial(101),
fname                 char(15),
lname                 char(15),
company               char(20),
address1               char(20),
address2               char(20),
city                  char(15),
state                  char(2),
zipcode                char(5),
phone                  char(18),
primary key (customer_num)
)
};
```

An SQL statement that is not enclosed within curly braces will generate a syntax error.

SQL statements are case insensitive (unless delimited by double quotes) and can be written in uppercase, lowercase, or mixed-case letters. Java statements are case sensitive.

Host Variables

Host variables are variables of the host language (in this case Java) that appear within SQL statements. A host variable represents a parameter, variable, or field and is prefixed by a colon (:), as in the following example:

```
#sql [ctx] { SELECT INTO customer WHERE customer_num = :cust_no };
```

You use the SELECT statement with the INTO (as shown in this example), the FETCH statement with the INTO clause (described in “Positional Iterators” on page 4-3), or an accessor method (described in “Named Iterators” on page 4-4) to retrieve data into host variables.

SELECT Statements That Return a Single Row

You use the SELECT...INTO statement for queries that return a single record of data. For queries that return multiple rows (called a *result set*) you use an iterator object, as described in the next section, “Handling Result Sets.”

The SELECT...INTO statement includes a list of host variables in the INTO clause to which the selected data is assigned. For example:

```
#sql
{
SELECT * INTO :customer_num, :fname, :lname, :company,
:address1, :address2, :city, :state, :zipcode,
:phone
FROM customer
WHERE customer_num = 101
};
```

The number of selected expressions must match the number of host variables. The SQL types must be compatible with the host variable types. If you use online checking, the SQLJ translator checks that the order, number, and types of the SQL expressions and host variables match. For information on how to perform online checking, see “Online Checking” on page 5-8.

Handling Result Sets

Embedded SQLJ uses iterator objects to manage result sets returned by SELECT statements. A result-set iterator is a Java object from which you can retrieve the data returned from the database. Iterator objects can be passed as parameters to methods and manipulated like other Java objects.

Important: Names of iterator classes must be unique within an application.

When you declare an iterator object, you specify a set of Java variables to match the SQL columns that your SELECT statement returns. There are two types of iterators: positional and named.

Positional Iterators

The order of declaration of the Java variables in a positional iterator must match the order in which the SQL columns are returned.

For example, the following statement generates a positional iterator class called **CustIter** with six columns:

```
#sql iterator CustIter( int , String, String, String, String, String );
```

This iterator can hold the result set from the following SELECT statement:

```
SELECT customer_num, fname, lname, address1,  
address2, phone  
FROM customer
```

You run the SELECT statement and populate the iterator object with the result set by using an Embedded SQLJ statement of the form:

```
#sql iterator-object = { SELECT ...};
```

For example:

```
CustIter cust_rec;  
#sql [ctx] cust_rec = { SELECT customer_num, fname, lname, address1,  
address2, phone  
FROM customer  
};
```

You retrieve data from a positional iterator into host variables using the FETCH...INTO statement:

```
#sql { FETCH :cust_rec  
INTO :customer_num, :fname, :lname,  
:address1, :address2, :phone  
};
```

The SQLJ translator checks that the types of the host variables in the INTO clause of the FETCH statement match the types of the iterator columns in corresponding positions.

The types of the SQL columns in the SELECT statement must be compatible with the types of the iterator. These type conversions are checked at translation time if you perform online checking. For information about setting up online checking, see "Online Checking" on page 5-8. For a listing of SQL and Java type mappings, see "SQL and Java Type Mappings" on page 4-7.

Named Iterators

The name of each Java variable of a named iterator must match the name of a column returned by your SELECT statement; order is irrelevant. The matching of SQL column names and iterator column names is case insensitive.

For example, the following statement generates a named iterator class called **CustRec**:

```
#sql iterator CustRec(  
int customer_num,  
String fname,  
String lname ,  
String company ,  
String address1 ,  
String address2 ,  
String city ,  
String state ,  
String zipcode ,  
String phone  
);
```

This iterator can hold the result set of any query that returns the columns defined in the iterator class. You use accessor methods of the same name as each iterator column to obtain the returned data, as shown in the example in "A Simple Embedded SQLJ Program" on page 3-3. The SQLJ translator uses the iterator

column names to create accessor methods. Iterator column names are case sensitive; therefore, you must use the correct case when you specify an accessor method.

You cannot use the FETCH...INTO statement with named iterators.

The following example illustrates the use of named iterators:

```
// Declare Iterator of type CustRec
CustRec cust_rec;

#sql cust_rec = { SELECT * FROM customer };

int row_cnt = 0;
while ( cust_rec.next() )
{
System.out.println("=====");
System.out.println("CUSTOMER NUMBER :" + cust_rec.customer_num());
System.out.println("FIRST NAME      :" + cust_rec.fname());
System.out.println("LAST NAME       :" + cust_rec.lname());
System.out.println("COMPANY        :" + cust_rec.company());
System.out.println("ADDRESS       :" + cust_rec.address1() +"\n" +
"              " + cust_rec.address2());
System.out.println("CITY          :" + cust_rec.city());
System.out.println("STATE         :" + cust_rec.state());
System.out.println("ZIPCODE      :" + cust_rec.zipcode());
System.out.println("PHONE        :" + cust_rec.phone());
System.out.println("=====");
System.out.println("\n\n");
row_cnt++;
}
System.out.println("Total No Of rows Selected :" + row_cnt);
cust_rec.close() ;
```

The **next()** method of the iterator object advances processing to successive rows of the result set. It returns FALSE after it fails to find a row to retrieve.

The Java compiler detects type mismatches for the accessor methods.

The validity of the types and names of the iterator columns and their related columns in the SELECT statement are checked at translation time if you perform online checking. For information about setting up online checking, see “Online Checking” on page 5-8.

Using Column Aliases

When an expression returned by a SELECT statement has an SQL name that is not a valid Java identifier, use SQL column aliases to rename them. For example, the name **Not valid for Java** is acceptable as a column name in SQL, but not as a Java identifier. You can use a column alias that has a name acceptable as a Java identifier by using the AS clause:

```
SELECT "Not valid for Java" AS "Col1" FROM tablename
```

When you create a named iterator class for this query, you specify the column alias name for the Java variable, as in:

```
#sql iterator Iterator_name (String Col1);
```

Iterator Methods

Both named and positional iterator objects have the following methods:

- **rowCount()**

Returns the number of rows retrieved by the iterator object

- **close()**
Closes the iterator; raises **SQLException** if the iterator is already closed
- **isClosed()**
Returns TRUE after the iterator's **close()** method has been called; otherwise, it returns FALSE

Positional iterators also have the **endFetch()** method. The **endFetch()** method returns TRUE when no more rows are available.

Named iterators also have the **next()** method. The **next()** method advances processing to successive rows of the result set. It returns FALSE after it fails to find a row to retrieve. For an example of how to use the **next()** method, see "Named Iterators" on page 4-4.

Positioned Updates and Deletes

To perform positioned updates and deletes in a result set, you use the WHERE CURRENT OF clause with a host variable that contains an iterator object. For example:

```
#sql { delete_statement/update_statement  
      WHERE CURRENT OF :iter };
```

At runtime, the variable *:iter* must contain an open iterator object that contains a result set selected from the same table accessed by the query in either *delete_statement* or *update_statement*. The current row of that iterator object is deleted or updated.

Monitoring the Execution of an SQL Query

You can monitor and modify the execution of an SQL query by using the *execution context* associated with it. An execution context is an instance of the class **sqlj.runtime.ExecutionContext**; an execution context is associated with each executable SQL operation in an Embedded SQLJ program.

You can supply an execution context explicitly for an SQL statement:

```
#sql [execCtx] {SQL_statement};
```

If you do not explicitly supply an execution context, the SQL statement uses the default execution context for the connection context you are using.

If you want to supply an explicit connection context and an explicit execution context, the SQL statement looks like this:

```
#sql [connCtx, execCtx] {SQL_statement };
```

You use the **getExecutionContext()** method of the connection context to obtain that connection's default execution context.

The execution-context object has attributes and methods that provide information about an SQL operation and the ability to modify its execution.

For each of the following attributes, there is a method called **getAttribute** that reads the value of the attribute, and a method called **setAttribute** that sets its value. The attributes are:

Attribute	Description
MaxRows	The maximum number of rows a query can return
MaxFieldSize	The maximum number of bytes that can be returned as data for any column or output variable
QueryTimeout	The number of seconds to wait for an SQL operation to complete
SQLWarnings	Any warnings that occurred during the last SQL operation
UpdateCount	The number of rows updated, inserted, or deleted during the last SQL operation

Calling SPL Routines and Functions

You can call a Stored Procedure Language (SPL) procedure by using the EXECUTE PROCEDURE statement. For example:

```
#sql { EXECUTE PROCEDURE proc_name(:arg_name) };
```

You can call a stored function by using the EXECUTE FUNCTION statement. For example:

```
#sql {EXECUTE FUNCTION func_name (func_arg ) into :num };
```

SQL and Java Type Mappings

When you retrieve data from a database into an iterator object (see “Handling Result Sets” on page 4-3) or into a host variable, you must use Java types that are compatible with the SQL types. The following table shows valid conversions from SQL types to Java types.

SQL Type	Java Type
BIGINT, BIGSERIAL	bigint
BLOB	byte[]
BOOLEAN	boolean
BYTE	byte[]
CHAR, CHARACTER	String
CHARACTER VARYING	String
CLOB	byte[]
DATE	java.sql.Date
DATETIME	java.sql.Timestamp
DECIMAL, NUMERIC, DEC	java.math.BigDecimal
FLOAT, DOUBLE PRECISION	double
INT8	long
INTEGER, INT	int
INTERVAL	IfxIntervalDF, IfxIntervalYM ¹
LVARCHAR	String
MONEY	java.math.BigDecimal
NCHAR, NVARCHAR	String
SERIAL	int
SERIAL8	long
SMALLFLOAT	float ²
SMALLINT	short
TEXT	String
VARCHAR	String

¹ IfxIntervalYM and IfxIntervalDF are Informix extensions to JDBC 2.0.² This mapping is JDBC compliant. You can use IBM Informix JDBC Driver to map SMALLFLOAT data type (via the JDBC FLOAT data type) to the Java double data type for backward compatibility by setting the IFX_GET_SMFLOAT_AS_FLOAT environment variable to 1.

You must also use compatible Java types for host variables that are arguments to SQL operations. This table shows valid conversions from Java types to SQL types.

Java Type	SQL Type
java.math.BigDecimal	DECIMAL
boolean	BOOLEAN
byte[]	BYTE
java.sql.Date	DATE
double	FLOAT ¹
float	SMALLFLOAT
int	INT
long	INT8
short	SMALLINT
String	CHAR
java.sql.Time	DATETIME
java.sql.Timestamp	DATETIME
com.informix.jdbc.IfxIntervalDF	INTERVAL
com.informix.jdbc.IfxIntervalYM	INTERVAL

¹ This mapping is JDBC compliant. You can use IBM Informix JDBC Driver to map the Java double data type (via the JDBC FLOAT data type) to the Informix SMALLFLOAT data type for backward compatibility by setting the IFX_GET_SMFLOAT_AS_FLOAT environment variable to 1.

Important: Unlike other host languages (for example, C), Java allows null data. Therefore, you do not need to use null indicator variables with Embedded SQLJ. The Java null value is equivalent to the SQL NULL value.

Language Character Sets

Embedded SQLJ supports Java's Unicode escape sequences. Also, if you set your Java property **file.encoding** to `8859_1` (or do not set it at all), you can use the Latin-1 character set.

To process files with a different encoding—for example, SJIS—you have the following choices:

- Use the JDK tool **native2ascii** to convert the native encoded source to a source with ASCII encoding.
- Set `file.encoding=SJIS` in **java.properties** in the Java home directory.
- Invoke the SQLJ translator using the following command:

```
java ifxsqlj -Dfile.encoding=SJIS file.sqlj
```

Importing Java Packages

Your Embedded SQLJ programs need to import the JDBC API (**java.sql.***) and SQLJ runtime (**sqlj.runtime.***) packages to which they refer. The classes you are likely to commonly use are:

- In package **java.sql** for the JDBC API:
The **SQLException** class—includes all runtime exceptions raised by Embedded SQLJ—and classes you explicitly use, such as **java.sql.Date**, **java.sql.ResultSet**.
- In package **sqlj.runtime** for SQLJ runtime:

SQLJ stream types (explicitly referenced): for example, **BinaryStream**, the **ConnectionContext** class, and the reference implementation of Embedded SQLJ classes (in `sqlj.runtime.ref`).

SQLJ Reserved Names

This section lists names reserved by the SQLJ translator. Do not use these names in your Embedded SQLJ programming.

Parameter, Field, and Variable Names

The string `_sJT` is a reserved prefix for generated variable names. Do not use this prefix for the names of:

- Variables declared within blocks that include SQL statements
- Parameters to methods that contain SQL statements
- Fields in classes that contain SQL statements or whose subclasses contain SQL statements

Class Names and Filenames

Do not declare classes that conflict with the names of internal classes. Do not create files that conflict with generated internal resource files.

The SQLJ translator creates internal classes and resource files for use by generated code. The names of these files and classes have a prefix composed of the name of the original input file followed by the string `_SJ`. For example, if you translate a file called `File1.sqlj` that uses the package `COM.foo`, the names of some of the internal classes produced are:

- `COM.foo.File1_SJInternalClass`
- `COM.foo.File1_SJProfileKeys`
- `COM.foo.File1_SJInternalClass$Inner`
- `COM.foo.File1_SJProfile0`
- `COM.foo.File1_SJProfile1`

Generated files for these internal classes, which are created in the same directory as the input file, `File1.sqlj`, are called:

- `File1_SJInternalClass.java` (includes the class `COM.foo.File1_SJInternalClass$Inner`)
- `File1_SJProfileKeys.java`
- `File1_SJProfile0.ser`
- `File1_SJProfile1.ser`

Files with the `.ser` extension are internal resource files that contain information about SQL operations in an `.sqlj` file.

Handling Errors

Some iterator and connection-context methods might raise exceptions specified by the JDBC API `SQLException` class. For information about using `SQLException` methods to obtain information about these errors, refer to your JDBC API documentation.

Chapter 5. Processing Embedded SQLJ Source Code

In This Chapter	5-1
Translating, Compiling, and Running Embedded SQLJ Programs	5-1
The ifxsqlj Command	5-2
Command Options	5-2
Basic Options	5-3
Advanced Options	5-4
Setting Options	5-7
Setting Options on the Command Line	5-7
Supplying Options in Property Files	5-7
Precedence of Options	5-8
Format of Property Files	5-8
Online Checking	5-8
Setting the -user and -password Options	5-9
Setting the -url and -driver Options	5-9
The ifxprofp Tool	5-9

In This Chapter

This chapter describes how to create executable Java programs from your Embedded SQLJ source code. It explains:

- How to use the SQLJ translator
- Basic translation and compilation options
- Advanced translation and compilation options
- How to use property files
- How to perform online checking

Translating, Compiling, and Running Embedded SQLJ Programs

You use the command `java ifxsqlj` to create executable Java `.class` files from your Embedded SQLJ source code.

When you run the `java ifxsqlj` command with an `.sqlj` source file, the source file is processed in two stages. In the first stage, called *translation*, the SQLJ translator creates a Java source file (with the extension `.java`). For example, when you process a file called `File1.sqlj`, the SQLJ translator creates a file called `File1.java`. The SQLJ translator also creates internal resource files with the extension `.ser`.

In the second stage of processing, the SQLJ translator passes `.java` files to a Java compiler. Compilation creates files with the extension `.class`; in this example, your compiled Java program is called `File1.class`. An internal resource file named `profilekeys.class` is also created. If your program includes an iterator, a file called `iterator_name.class` is produced.

Tip: To perform translation only, execute the `java ifxsqlj` command with the `-compile` option set to `FALSE`. For information about the `-compile` option, see “Advanced Options” on page 5-4.

To create a complete application, you must include the directories that contain the SQLJ runtime classes in `sqlj.runtime.*` in your `CLASSPATH` environment variable

definition. The SQLJ runtime files are available in **ifxsqlj.jar**, the file that you installed when you first installed the Embedded SQLJ product, as described in “Setting Up Your Software” on page 2-1.

In addition, you must include the locations of **ifxtools.jar** and the relevant version of the JDK in your **CLASSPATH** definition. At runtime, you must also include the location of **ifxjdbc.jar**; however, you do not need to include this file location when translating or compiling your application.

You run your Embedded SQLJ program like any other Java program, by using the Java interpreter, as follows:

```
java File1
```

The ifxsqlj Command

You use the **java ifxsqlj** command to translate and compile your Embedded SQLJ source code, as described above. You run the **java ifxsqlj** command at the DOS or UNIX prompt.

The syntax of the **java ifxsqlj** command is as follows:

```
java ifxsqlj optionlist filelist
```

optionlist A set of options separated by spaces. Some options have prefixes to indicate they are to be passed to utilities other than the SQLJ translator, such as the Java compiler.

filelist A list of filenames separated by spaces: for example,
file1.sqlj file2.sqlj

You must include the absolute or relative path to the files in *filelist*.

The files can have the extension **.sqlj** or **.java**. You can specify **.sqlj** files together with **.java** files on the same command line.

If you have **.sqlj** and **.java** files that require access to code in each other's file, enter all of these files on the command line for the same execution of the **java ifxsqlj** command.

You can use an asterisk (*****) as a wildcard to specify filenames; for example, **c*.sqlj** processes all files beginning with **c** that have the extension **.sqlj**.

When you run the **java ifxsqlj** command, your **CLASSPATH** environment variable must be set to include any directories that contain **.class** files and **.ser** files the translator needs to access for type resolution of variables in your Embedded SQLJ source code.

Command Options

Many options are available to customize how you run the **java ifxsqlj** command:

- Basic options are described in the next section.
- Advanced options are described in “Advanced Options” on page 5-4.

You can set options either on the command line or in property files. Options set on the command line can be passed to the SQLJ translator, the Java compiler, or the Java interpreter. Options set in property files can be passed to the SQLJ translator

or the Java compiler, but not to the Java interpreter. For more information, see “Setting Options on the Command Line” on page 5-7 and “Supplying Options in Property Files” on page 5-7.

Basic Options

The following table lists the basic options available for use with the `java ifxsqlj` command.

Option	Description
<code>-d</code>	Specifies the root output directory for generated <code>.ser</code> and <code>.class</code> files If you do not specify this option, files are generated under the directory of the input <code>.sqlj</code> file.
<code>-dir</code>	Specifies the root output directory for generated <code>.java</code> files If you do not specify this option, files are generated under the directory of the input <code>.sqlj</code> file.
<code>-encoding</code>	Specifies the GLS encoding for <code>.sqlj</code> and <code>.java</code> input files and for <code>.java</code> generated files If unspecified, the setting of the <code>file.encoding</code> property for the Java interpreter is used. The <code>-encoding</code> option is also passed to the Java compiler.
<code>-help</code>	Displays option names, descriptions, and current settings The list displays: <ul style="list-style-type: none">• The name of the option• The type of the option (for example, if it is Boolean) or a selection of allowed values• The current value• A description of the option• Whether the property is at its default, or was set by either a property file or the command line No translation or compilation is performed when you specify the <code>-help</code> option.
<code>-linemap</code>	Enables the mapping of line numbers between the generated <code>.java</code> file and the original <code>.sqlj</code> file The <code>-linemap</code> option is useful for debugging because it allows you to trace compilation and execution errors back to your Embedded SQLJ source code. For the <code>-linemap</code> option to be effective, the name of the <code>.sqlj</code> source code file must match the name of the class it implements.
<code>-props</code>	Specifies the name of the property file from which to read options “The ifxpropf Tool” on page 5-9 explains how to use property files.
<code>-status</code>	Displays status messages while the <code>java ifxsqlj</code> command is running
<code>-version</code>	Displays the version of Embedded SQLJ you are using No translation or compilation is performed when you specify the <code>-version</code> option.

-warn Specifies a list of flags in a comma-separated string for controlling the display of warning and information messages during translation

The flags are:

- **all/none**. Turns on or off all warnings and information messages
- **null(default)/nonnull**. Specifies whether the translator checks nullable columns and nullable Java variable types for conversion loss when data is transferred between database columns and Java host variables
The translator must connect to the database for this option to be in effect.
- **precision(default)/noprecision**. Specifies whether the translator checks for loss of precision when data is transferred between database columns and Java variables
The translator must connect to the database for this option to be in effect.
- **portable(default)/noportable**. Turns on or off warning messages about the portability of Embedded SQLJ statements
- **strict(default)/nostrict**. Specifies whether the translator checks named iterators against the columns returned by a SELECT statement and issues a warning for any mismatches
The translator must connect to the database for this option to be in effect.
- **verbose(default)/noverbose**. Turns on or off additional information messages about the translation process
The translator must connect to the database for this option to be in effect.

For example, the following setting of the **-warn** option turns off all warnings and then turns on the precision and nullability checks:

```
-warn=none,null,precision
```

Advanced Options

The following table lists the advanced options available for use with the **java ifxsqlj** command. Many of these options are for online checking, which is discussed in “Online Checking” on page 5-8.

Option	Description
-cache	<p>Turns on the caching of results from online checking</p> <p>Caching saves you from unnecessary connections to the database in subsequent runs of the translator for the same file.</p> <p>Results are written to the file SQLChecker.cache in your current directory. The cache holds serialized representations of all SQL statements that translated without errors or warnings. The cache is cumulative and grows through successive invocations of the translator.</p> <p>You empty the cache by deleting the SQLChecker.cache file.</p> <p>Caching is off by default; you turn caching on by setting the -cache option to true, 1, or on; for example, -cache=true. You turn caching off by setting the option to false, 0, or off.</p>

- compile** Set this flag to false to disable processing of `.java` files by the compiler. This applies to generated `.java` files and to `.java` files specified on the command line.
- compiler-executable** Specifies a particular Java compiler for the `java ifxsqlj` command to use

If not specified, the translator uses `javac`. If you do not specify a directory path, the `java ifxsqlj` command searches for the executable according to the setting of your `PATH` environment variable.
- compiler-encoding-flag** Set this flag to false to prevent the value of the SQLJ `-encoding` option from being automatically passed to the compiler.
- compiler-output-file** If you have instructed the Java compiler to output its results to a file, use the `-compiler-output-file` option to specify the filename.
- driver** Specifies a list of JDBC drivers that can be used to interpret JDBC connection URLs for online checking (see “Online Checking” on page 5-8)

You specify a class name or a comma-separated list of class names. For example, specify IBM Informix JDBC Driver as follows:
`-driver=com.informix.jdbc.IfxDriver`
- offline** Specifies a Java class to implement off-line checking

The default off-line checker class is `sqlj.semantics.OfflineChecker`.

Off-line checking only runs when online checking does not (either because online checking was not enabled or because it stopped because of error). Off-line checking verifies SQL syntax and the usage of Java types.

With off-line checking, there is no connection to the database.
- online** Specifies a Java class or list of classes to implement online checking

The default online checker class is `sqlj.semantics.JdbcChecker`.

You can specify an online checker class for a particular connection context, as in:
`-online@ctxclass2=sqlj.semantics.JdbcChecker`

You must specify a user name with the `-user` option for online checking to occur. The `-password`, `-url`, and `-driver` options must be appropriately set as well.
- password** Specifies a password for the user name set with the `-user` option

If you specify the `-user` option, but not the `-password` option, the translator prompts you for the password.

If you are using multiple connection contexts, the setting for `-password` for the default connection context also applies to any connection context that does not have a specific setting.
- ser2class** Set this flag to true to convert the generated `.ser` files to `.class` files. This is necessary if you are creating an applet to be run from a

browser, such as Netscape 4.0, that does not support loading a serialized object from a resource file.

The original **.ser** file is not saved.

-url Specifies a JDBC URL for establishing a database connection for online checking (see “Database URLs” on page A-1 and “Online Checking” on page 5-8)

The URL can include a host name, a port number, and an Informix database name. The format is:

```
jdbc:informix-sqli://{<ip-address>|
<domain-name>};<port-number>[/<dbname>]:
INFORMIXSERVER=<server-name>[;user=<username>;
password=<password>;<name>=<value>
[;<name>=<value>]...]
```

If you are using multiple connection contexts, the setting for **-url** for the default context also applies to any connection context that does not have a specific setting.

You can specify a URL for a particular connection context, as in **-url@ctxclass2=...**

Any connection context with a URL must also have a user name set for it (using the **-user option**) for online checking to occur.

-user Enables online checking and specifies the user name with which the translator connects to the database (see “Online Checking” on page 5-8)

For example, to enable online checking on the default connection context and connect with the user name **fred**, use the following option:

```
-user=fred
```

If you are using multiple connection contexts, the setting for **-user** for the default connection context also applies to any connection context that does not have a specific setting.

If you want to enable online checking for the default context, but turn off online checking for another connection—for example *ctxcon2*—you need to specify the **-user** option twice:

```
-user=fred -user@ctxcon2=
```

To enable online checking for a particular connection context, specify that context with the user name, as in:

```
-user@ctxcon3=joyce
```

The classes of the connection contexts you specify must all be declared in your source code or previously compiled into a **.class** file.

-vm Specifies a particular Java interpreter for the **java ifxsqlj** command to use

You must also include the path to the interpreter. If you do not specify a particular Java interpreter using this option, the translator uses **java** as a default.

The **-vm** option must be specified on the command line; you cannot set it in a property file.

Setting Options

You specify options for the **java ifxsqlj** command either on the command line or in a property file. Command line options are discussed in “Setting Options on the Command Line” on page 5-7. Property files are discussed in “Supplying Options in Property Files” on page 5-7.

For Boolean options (those that are either on or off), you can set the option simply by specifying the option name; for example, `-linemap`. You can also set the option to `TRUE`, as in `-linemap=true`. To turn off a Boolean option, you must set it to `FALSE`: for example, `-linemap=false`. You can also set Boolean options to `yes` or `no`, or to `1` or `0`.

Setting Options on the Command Line

Options on the command line override any options set in default files. If the same option appears more than once on the command line, the translator uses the final (rightmost) option’s value.

Command-line option names are case sensitive.

You can attach prefixes to options to pass the option to the Java compiler or to the Java interpreter. If you do not use a prefix, the option is passed to the SQLJ translator.

The prefixes are:

-C Passes compiler options to the Java compiler, as shown in the following example:

```
-C-classpath=/user/jdk/bin
```

-J Passes interpreter options to the Java interpreter, as shown in the following example:

```
-J-Duser.language=ja
```

The options available to pass to the interpreter depend on the release and brand of Java you are using.

Do not use the **-C** prefix with the **-d** and **-encoding** options; when you specify these SQLJ translator options, they are automatically passed to the Java compiler.

Supplying Options in Property Files

You can use property files to supply options to the **java ifxsqlj** command. The default name of a property file is **sqlj.properties**; you can specify a different name by using the **-props** option on the command line (see “Basic Options” on page 5-3).

You cannot use a property file to specify:

- The **-props**, **-help**, and **-version** basic options
- The **-vm** advanced option
- Options with the prefix **-J** (for passing options to the Java interpreter)

Precedence of Options

The `java ifxsqlj` command checks for the existence of files called `sqlj.properties` in the following directories in the following order:

1. The Java home directory
2. Your home directory
3. The current directory

The translator processes each property file it finds and overrides any previously set option if it finds a new setting for that option.

Later entries in the same property file override earlier entries.

Options on the command line override options set by property files.

If you set options on the command line or in a property file specified using the `-props` option, these options override any options set in `sqlj.properties` files.

Format of Property Files

In a property file, you:

- Specify one option per line.
- Begin a line with the symbol `#` to denote a comment.

Tip: The translator ignores empty lines.

The syntax for specifying options is the same as shown in “Command Options” on page 5-2, except you replace the initial hyphen with a string followed by a period that indicates to which utility the option is passed.

You can pass options to the SQLJ translator or the Java compiler; however, you cannot pass options to the Java interpreter from a property file. The strings for specifying utilities are as follows.

Precede an option with...	To pass it to this utility...
<code>sqlj.</code>	SQLJ translator
<code>compile.</code>	Java compiler

An example property file looks like this:

```
# Turn on online checking and specify the user to connect with
sqlj.user=joyce
sqlj.password=*****
# JDBC Driver to connect with
sqlj.driver=com.informix.jdbc.IfxDriver
# Database URL
sqlj.url=jdbc:<ipaddr>:<portno>/demo_isqlj:informixserver=<${INFORMIXSERVER}>
# Instruct the compiler to output status messages during compile
compile.verbose
```

Online Checking

Online checking analyzes the validity of the embedded SQL statements against the database schema (user name, password, and database) you specify.

Online checking performs the following operations:

- Passes SQL data manipulation statements (DML) to the database to verify their syntax and semantics and their validity for the database schema

- Checks stored procedures and functions for overloading
- Runs the checks covered by off-line checking

Off-line checking verifies SQL syntax and usage of Java types; there is no connection to a database for off-line checking.

To set up online checking, you use the following options with the `java ifxsqlj` command or set them in a property file: `-user`, `-password`, `-url`, and `-driver`. These options are described in “Advanced Options” on page 5-4.

Setting the `-user` and `-password` Options

You enable online checking by setting the `-user` option. The `-user` option also supplies the user name for the database connection to be used for checking. You do not have to specify the same database or user name for online checking as the application uses at runtime.

In the simplest case, you supply a user name with the `-user` option, and online checking is performed using the default connection context, as in:

```
-user = joyce
```

You can supply the password for the user name by using the `-password` option or by combining the password with the user name; for example,
`-user = joyce/jcs123` or `-user = joyce -password =jcs123`.

To disable online checking on the command line, set the `-user` option to an empty value (as in `-user=`) or omit the option entirely. To disable online checking in a property file, comment out the line specifying `sqlj.user`.

To enable online checking against a nondefault connection context, you specify the connection context with the user name in the `-user` option. In the following example, the SQLJ translator connects to the database specified in the connection-context object, `conctx`, using the user name `fred`:

```
-user@conctx = fred
```

Setting the `-url` and `-driver` Options

The `-url` option specifies a JDBC URL for establishing a database connection (see “Database URLs” on page A-1).

The `-driver` option specifies a list of JDBC drivers that can be used to interpret JDBC connection URLs for online checking.

Both of these options are shown in “Advanced Options” on page 5-4.

The `ifxprofp` Tool

Embedded SQLJ includes the `ifxprofp` tool. The tool `ifxprofp` enables you to print out the information stored in internal resource `.ser` files, for debugging purposes. You invoke the tool as follows:

```
java ifxprofp filename.ser
```

Here is an example of the output of the `ifxprofp` tool:

```
=====
printing contents of profile Demo02_SJProfile0
created 918584057644 (2/9/99 10:14 AM)
associated context is sqlj.runtime.ref.DefaultContext
```

```
profile loader is sqlj.runtime.profile.DefaultLoader@1f7f1941
contains no customizations
original source file:Demo02.sqlj
contains 8 entries
=====
profile Demo02_SJProfile0 entry 0
#sql { CREATE DATABASE demo_sqlj WITH LOG MODE ANSI
      };
line number:59
PREPARED STATEMENT executed via EXECUTE_UPDATE
role is STATEMENT
descriptor is null
contains no parameters
result set type is NO_RESULT
result set name is null
contains no result columns
=====
```

Appendix A. Connecting to Databases

“Connecting to a Database” on page 3-1 describes how Embedded SQLJ programs connect to databases. This appendix provides background information and information about using nondefault connection contexts.

The ConnectionManager Class

You use the **ConnectionManager** class to make a connection to a database, as described in “Connecting to a Database” on page 3-1. The **ConnectionManager** class has two methods:

- **newConnection()**
- **initContext()**

The **newConnection()** method creates and returns a new JDBC **Connection** object using the current values of the **DRIVER**, **DBURL**, **UID**, and **PWD** attributes. If any of the needed attributes is null or a connection cannot be established, an error message is printed to **System.out**, and the program exits.

The **initContext()** method returns the currently installed default context. If the current default context is null, a new default context instance is created and installed using a connection obtained from a call to **getConnection**.

Database URLs

The **DBURL** data member of the **ConnectionManager** class and the value for the **-url** option that you specify for online checking are database URLs. (For information about online checking, see “Online Checking” on page 5-8.) Database URLs specify the subprotocol (the database connectivity mechanism), the database or server identifier, and a list of properties.

Your Embedded SQLJ program uses IBM Informix JDBC Driver to connect to an Informix database. IBM Informix JDBC Driver supports database URLs of the following format:

```
jdbc:informix-sqli://[ip-address|host-name];port-number[/dbname]:  
INFORMIXSERVER=server-name;[user=user;password=password]  
[name=value;name=value...]
```

In the preceding syntax:

- Curly brackets ({}) together with vertical lines (|) denote more than one choice of variable.
- *Italics* denote a variable value.
- Brackets ([]) denote an optional value.
- Words or symbols not enclosed in brackets are required (INFORMIXSERVER=, for example).

Important: Spaces are not allowed in the database URL.

The following table describes the variable parts of the database URL.

Database URL Variable	Required?	Description
<i>ip-address</i> or <i>domain-name</i>	Yes	The IP address or the domain name of the computer running the Informix database server An example of an IP address is 123.45.67.89. An example of a domain name is myhost.com.
<i>port-number</i>	Yes	The port number of the Informix database server
<i>dbname</i>	No	The name of the Informix database to which you want to connect If you do not specify the name of a database, a connection is made to the Informix database server.
<i>server-name</i>	Yes	The name of the Informix server to which you want to connect This is the value of the INFORMIXSERVER environment variable. The INFORMIXSERVER environment variable is required in the database URL, unless it is included in the property list.
<i>username</i>	Yes	The name of the user you want to connect to the Informix database or database server as
<i>password</i>	Yes	The password of the user specified by <i>username</i>
<i>name=value</i>	No	A name-value pair that specifies a <i>value</i> for the Informix environment variable contained in the <i>name</i> variable, recognized by either IBM Informix JDBC Driver or Informix database servers The value of <i>name</i> is case insensitive. For information about environment variables supported by IBM Informix JDBC Driver and how to set them, refer to the <i>IBM Informix JDBC Driver Programmer's Guide</i> .

Using Nondefault Connection Contexts

This section explains how to use nondefault connection contexts. Embedded SQLJ uses a connection-context object to manage the connection to the database in which you want an SQL statement to execute. You can specify different connection-context objects for different SQL statements in the same Embedded SQLJ program, as shown in the sample program **MultiConnect.sqlj** included in this section.

To use a nondefault connection context:

1. Define the connection-context class by using an Embedded SQLJ connection statement. The syntax of the connection statement is as follows:

```
#sql [modifiers] context java_class_name;
```

modifiers A list of Java class modifiers: for example, **public**

java_class_name

The name of the Java class of the new connection context

2. Create a connection-context object for connecting to the database.
3. Specify the connection-context object in your Embedded SQLJ statement in parentheses following the **#sql** string.

MultiConnect.sqlj

The sample program **MultiConnect.sqlj** creates two databases with one table each, **Orders** and **Items**, and inserts two records in the **Orders** table and corresponding records in the **Items** table. The program prints the order line items for all the orders from both tables, which exist in different databases, by creating separate connection contexts for each database.

MultiConnect.sqlj calls the methods **executeSQLScript()** and **getConnection()**. These methods are contained in **demoUtil.java**, which follows this program.

```

/*****
*
*                               IBM CORPORATION
*
*                               PROPRIETARY DATA
*
*   THIS DOCUMENT CONTAINS TRADE SECRET DATA WHICH IS THE PROPERTY OF
*   IBM CORPORATION.  THIS DOCUMENT IS SUBMITTED TO RECIPIENT IN
*   CONFIDENCE.  INFORMATION CONTAINED HEREIN MAY NOT BE USED, COPIED OR
*   DISCLOSED IN WHOLE OR IN PART EXCEPT AS PERMITTED BY WRITTEN AGREEMENT
*   SIGNED BY AN OFFICER OF IBM CORPORATION.
*
*   THIS MATERIAL IS ALSO COPYRIGHTED AS AN UNPUBLISHED WORK UNDER
*   SECTIONS 104 AND 408 OF TITLE 17 OF THE UNITED STATES CODE.
*   UNAUTHORIZED USE, COPYING OR OTHER REPRODUCTION IS PROHIBITED BY LAW.
*
*   Title:           MultiConnect.sqlj
*
*   Description:    This demonstrates usage of 2 connection contexts using
*                   different URLs.
*
*****
*/

import java.sql.*;
import java.math.*;
import java.lang.*;
import sqlj.runtime.*; //SQLJ runtime classes
import sqlj.runtime.ref.*;

/* Declare ConnectionContext classes OrdersCtx and ItemsCtx.
 * OrdersCtx is related to the orders table which is in orders_db database
 * ItemsCtx is related to the items table which is in items_db database
 * Instances of these classes are used to specify where SQL operations
 * on orders table or items table shld should execute.
 * We create the 2 databases using a default context using ConnectionManager
 *
 * For an order (from the orders table in the orders_db database), we try
 * to query the items table(in the items_db database) for the line items which
 * make up that order
 *
 */

#sql context OrdersCtx;
#sql context ItemsCtx;

// Declare 2 named iterators for Items and Orders

#sql iterator OrdersRec (
    Integer    order_num,
    Date       order_date,
    String     po_num,

```

```

        Date        paid_date
    );

#sql iterator ItemsRec (
    Short    item_num,
    int      order_num,
    Short    stock_num,
    String   manu_code,
    Integer  quantity,
    BigDecimal total_price
);

public class MultiConnect extends demoUtil
{
    private OrdersCtx o_ctx = null;
    private ItemsCtx i_ctx = null;
    private DefaultContext ctx = null;

    // The constructor sets up a default database context

    MultiConnect()
    {
        /* Initialize database connection thru Connection Manager
        * and create a default context
        */
        ctx = ConnectionManager.initContext();
    }

    public static void main (String args[]) throws SQLException
    {
        MultiConnect mc_ob = new MultiConnect();
        try
        {
            System.out.println( "Running demo program MultiConnect...." );
            mc_ob.runDemo();

            //Close the connection
            mc_ob.o_ctx.close() ;
            mc_ob.i_ctx.close() ;
        }
        catch (SQLException s)
        {
            System.err.println( "Error running demo program: " + s );
            System.err.println( "Error Code           : " +
                s.getErrorCode());
            System.err.println( "Error Message        : " +
                s.getMessage());
        }
    }

    void runDemo() throws SQLException
    {
        // We drop the 2 databases using the default context

        drop_db();

        /*
        * We create the 2 databases needed for the program using the
        * default Connection Context
        */

        #sql [ctx] { CREATE DATABASE orders_db WITH LOG MODE ANSI };
        #sql [ctx] { CREATE DATABASE items_db WITH LOG MODE ANSI };
        ctx.close();

        String driver = "com.informix.jdbc.IfxDriver";
        String url = "jdbc:158.58.9.121:1527:informixserver=tulua2";
        String user = "rdtest";
        String password = "1RDSRDS";
        set_driver(driver);
        set_url(url);
    }
}

```

```

set_user(user);
set_passwd(password);
getConnect();

// Create the schema and the tables by running the SQL scripts
executeSQLScript("./schema.sql");
conn.close();

// We now set up the Connection context OrdersCtx
url = "jdbc:158.58.9.121:1527/orders_db:informixserver=tulua2";
set_url(url);
o_ctx = new OrdersCtx(getConnect());

/* Change the url to reflect items database
 * Here we are changing the database name
 * the machine name and the port no could also be different
 */

url = "jdbc:158.58.9.121:1527/items_db:informixserver=tulua2";
set_url(url);
i_ctx = new ItemsCtx(getConnect());

// Declare orders_rec of type OrdersRec
OrdersRec orders_rec;

// Using context o_ctx query orders

#sql [o_ctx] orders_rec =
{ SELECT order_num, order_date, po_num, paid_date
  FROM orders
};
while ( orders_rec.next() )
{
System.out.println("=====");
System.out.print("ORDER NUMBER:" + orders_rec.order_num() + "\t\t");
System.out.println("ORDER DATE:" + orders_rec.order_date() );
System.out.print("PURCHASE ORDER NUMBER:" +
orders_rec.po_num() + "\t");
System.out.println("PAID DATE:" + orders_rec.paid_date() );
System.out.println("=====");
System.out.print("\n");
int ord_no = orders_rec.order_num().intValue();
printItemRec( fetchItemRec(ord_no) );
}
System.out.println("\n");
}
ItemsRec fetchItemRec(int ord_no) throws SQLException
{
ItemsRec items_rec;
#sql [i_ctx] items_rec =
{ SELECT item_num, order_num, stock_num, manu_code, quantity,
total_price
  FROM items
  WHERE order_num = :ord_no
};
return items_rec;
}
void printItemRec(ItemsRec items_rec) throws SQLException
{
System.out.print("ITEM NUMBER  ");
System.out.print("STOCK NUMBER  ");
System.out.print("MANUFACTURER CODE  ");
System.out.print("QUANTITY  ");
System.out.print("TOTAL PRICE  ");
System.out.println("\n-----"+
"-----");
while ( items_rec.next() )
{
System.out.print(items_rec.item_num() + "\t\t");

```

```

        System.out.print(items_rec.stock_num() + "\t\t" );
        System.out.print(items_rec.manu_code()+ "\t\t");
        System.out.print(items_rec.quantity() + " " + "\t\t");
        System.out.print(items_rec.total_price() + "\t\t");
        System.out.print("\n");
    }
    System.out.println("\n");

}
void drop_db() throws SQLException
{
    try
    {
        #sql [ctx] { drop database orders_db };
        #sql [ctx] { drop database items_db };
    }
    catch (SQLException s) { }
}
}
/*****
*
*                               IBM CORPORATION
*
*                               PROPRIETARY DATA
*
* THIS DOCUMENT CONTAINS TRADE SECRET DATA WHICH IS THE PROPERTY OF
* IBM CORPORATION THIS DOCUMENT IS SUBMITTED TO RECIPIENT IN
* CONFIDENCE. INFORMATION CONTAINED HEREIN MAY NOT BE USED, COPIED OR
* DISCLOSED IN WHOLE OR IN PART EXCEPT AS PERMITTED BY WRITTEN AGREEMENT
* SIGNED BY AN OFFICER OF IBM CORPORATION.
*
* THIS MATERIAL IS ALSO COPYRIGHTED AS AN UNPUBLISHED WORK UNDER
* SECTIONS 104 AND 408 OF TITLE 17 OF THE UNITED STATES CODE.
* UNAUTHORIZED USE, COPYING OR OTHER REPRODUCTION IS PROHIBITED BY LAW.
*
* Title:          demoUtil.java
*
* Description:    Utilities used in the demo programs
*
*
* *****/
*/

import java.io.*;
import java.util.*;
import java.lang.*;
import java.sql.*;

public class demoUtil
{
    private String driver;
    private String URL;
    private String myURL;
    private String user;
    private String passwd;
    private int count = 0;
    private int lineno = 0;
    private int errors = 0;
    private boolean end_of_file = false;
    private FileInputStream fs = null;
    private DataInputStream in = null;
    private BufferedReader br = null;
    private String line = null;
    private StringBuffer read_line = null;
    public Connection conn;

    public void executeSQLScript(String SQLscript)
    {
        try

```

```

    {
        fs = new FileInputStream(SQLscript);
    }
    catch (Exception e)
    {
        System.out.println("Script File Not Found");
        e.printStackTrace();
    }

    in = new DataInputStream(fs);
    br = new BufferedReader(new InputStreamReader(in));
    line = getNextLine();
    read_line = (line==null) ? new StringBuffer() : new StringBuffer(line);
    while (!end_of_file)
    {
        if (line!=null && line.indexOf(';')==line.length()-1)
        {
            tryExecute(read_line);
            read_line = new StringBuffer();
        }
        line = getNextLine();
        if (line!=null)
            read_line.append(line).append(" ");
    }
    if (read_line!=null && read_line.length()>0)
    {
        tryExecute(read_line);
    }
    System.out.println("\n");
}
private boolean isComment(String s)
{
    if (s!=null)
        s.trim();
    return (
        s==null || s.equals("")
        || (s.length()>=2 && s.substring(0,2).equals("--"))
        || (s.length()>=4 && s.substring(0,4).toUpperCase().equals(
            "REM "))
    );
}

private String getNextLine()
{
    String line = null;
    lineno++;

    try
    {
        line = br.readLine();
        if (line==null)
            end_of_file=true;
    }
    catch (IOException e)
    {
        line = null;
        end_of_file=true;
    }

    return ( (isComment(line)) ? null : line);
}

private String bufferToCommand(StringBuffer sb)
{
    String s = sb.toString().trim();

    // chop off trailing semicolon
    if (s.substring(s.length()-1,s.length()).equals(";"))
        s = s.substring(0,s.length()-1);

    return s;
}

```

```

}
private void tryExecute(StringBuffer sb)
{
    String cmd = bufferToCommand(sb);
    System.out.print(".");
    System.out.flush();

    try
    {
        count++;
        Statement stmt = conn.createStatement();
        stmt.executeUpdate(cmd);
        stmt.close();
    }
    catch (SQLException e)
    {
        errors++;
        System.out.println("SQL Error line "+lineno+": "+e.getMessage());
        System.out.println("SQLState: " + e.getSQLState());
        System.out.println("ErrorCode: " + e.getErrorCode());
        System.out.println("Offending statement: '"+cmd+"'");
        e.printStackTrace();
    }
}
public void set_driver(String driver)
{
    this.driver = driver;
}
public void set_url(String url)
{
    this.URL = url;
}
public void set_user(String userName)
{
    this.user = userName;
}
public void set_passwd(String passwd)
{
    this.passwd = passwd;
}
public void connSetup()
{
    try
    {
        Class.forName(driver);
    }
    catch (Exception e)
    {
        System.out.println("Failed to load IBM Informix JDBC driver.");
        e.printStackTrace();
    }
}
myURL = URL ;
myURL = myURL + ";user=" + user + ";password=" + passwd;
}
public Connection getConnect()
{
    connSetup();
    try
    {
        conn = DriverManager.getConnection(myURL);
    }
    catch (SQLException e)
    {
        System.out.println("Connect Error : " + e.getErrorCode());
        System.out.println("Failed to connect: " + e.toString());
        e.printStackTrace();
    }
    return conn;
}
public Connection getConnect(Connection i_conn)
{

```

```
connSetup();
try
{
    i_conn = DriverManager.getConnection(myURL);
}
catch (SQLException e)
{
    System.out.println("Connect Error : " + e.getErrorCode());
    System.out.println("Failed to connect: " + e.toString());
    e.printStackTrace();
}
return i_conn;
}
```

Appendix B. Sample Programs

The following table lists and describes the online sample programs that are included with IBM Informix Embedded SQLJ.

Demo Program Name	Description
Demo01.sqlj	Demonstrates a simple connection to the database
Demo02.sqlj	Demonstrates a simple SELECT statement and the use of host variables
Demo03.sqlj	Demonstrates the use of a named iterator
Demo04.sqlj	Demonstrates the use of a positional iterator
Demo05.sqlj	Demonstrates interoperability between a JDBC ResultSet object and an SQLJ iterator
Demo06.sqlj	Demonstrates interoperability between a JDBC Connection object and an SQLJ connection-context object

The sample programs are located in the **IFXJLOCATION/demo/sqlj** directory (**IFXJLOCATION** refers to the directory where you chose to install Embedded SQLJ). The README file in the directory explains how to compile and run the programs.

Appendix C. Accessibility

IBM strives to provide products with usable access for everyone, regardless of age or ability.

Accessibility features for IBM Informix

Accessibility features help a user who has a physical disability, such as restricted mobility or limited vision, to use information technology products successfully.

Accessibility Features

The following list includes the major accessibility features in IBM Informix. These features support:

- Keyboard-only operation.
- Interfaces that are commonly used by screen readers.
- The attachment of alternative input and output devices.

Tip: The IBM Informix Information Center and its related publications are accessibility-enabled for the IBM Home Page Reader. You can operate all features using the keyboard instead of the mouse.

Keyboard Navigation

This product uses standard Microsoft Windows navigation keys.

Related Accessibility Information

IBM is committed to making our documentation accessible to persons with disabilities. Our publications are available in HTML format so that they can be accessed with assistive technology such as screen reader software. The syntax diagrams in our publications are available in dotted decimal format.

You can view the publications for IBM Informix in Adobe Portable Document Format (PDF) using the Adobe Acrobat Reader.

IBM and Accessibility

See the *IBM Accessibility Center* at <http://www.ibm.com/able> for more information about the commitment that IBM has to accessibility.

Notices

This information was developed for products and services offered in the U.S.A.

IBM may not offer the products, services, or features discussed in this document in all countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

IBM Director of Licensing
IBM Corporation
North Castle Drive
Armonk, NY 10504-1785
U.S.A.

For license inquiries regarding double-byte (DBCS) information, contact the IBM Intellectual Property Department in your country or send inquiries, in writing, to:

Intellectual Property Licensing
Legal and Intellectual Property Law
IBM Japan Ltd.
1623-14, Shimotsuruma, Yamato-shi
Kanagawa 242-8502 Japan

The following paragraph does not apply to the United Kingdom or any other country where such provisions are inconsistent with local law:

INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

Any references in this information to non-IBM Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this IBM product and use of those Web sites is at your own risk.

IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Licensees of this program who wish to have information about it for the purpose of enabling: (i) the exchange of information between independently created programs and other programs (including this one) and (ii) the mutual use of the information which has been exchanged, should contact:

IBM Corporation
J46A/G4
555 Bailey Avenue
San Jose, CA 95141-1003
U.S.A.

Such information may be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

The licensed program described in this information and all licensed material available for it are provided by IBM under terms of the IBM Customer Agreement, IBM International Program License Agreement, or any equivalent agreement between us.

Any performance data contained herein was determined in a controlled environment. Therefore, the results obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

Information concerning non-IBM products was obtained from the suppliers of those products, their published announcements or other publicly available sources. IBM has not tested those products and cannot confirm the accuracy of performance, compatibility or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products.

All statements regarding IBM's future direction or intent are subject to change or withdrawal without notice, and represent goals and objectives only.

All IBM prices shown are IBM's suggested retail prices, are current and are subject to change without notice. Dealer prices may vary.

This information contains examples of data and reports used in daily business operations. To illustrate them as completely as possible, the examples include the names of individuals, companies, brands, and products. All of these names are fictitious and any similarity to the names and addresses used by an actual business enterprise is entirely coincidental.

COPYRIGHT LICENSE:

This information contains sample application programs in source language, which illustrate programming techniques on various operating platforms. You may copy, modify, and distribute these sample programs in any form without payment to IBM, for the purposes of developing, using, marketing or distributing application programs conforming to the application programming interface for the operating platform for which the sample programs are written. These examples have not

been thoroughly tested under all conditions. IBM, therefore, cannot guarantee or imply reliability, serviceability, or function of these programs. The sample programs are provided "AS IS", without warranty of any kind. IBM shall not be liable for any damages arising out of your use of the sample programs.

Each copy or any portion of these sample programs or any derivative work, must include a copyright notice as follows:

© (your company name) (year). Portions of this code are derived from IBM Corp. Sample Programs. © Copyright IBM Corp. (enter the year or years). All rights reserved.

If you are viewing this information softcopy, the photographs and color illustrations may not appear.

Trademarks

IBM, the IBM logo, and [ibm.com](http://www.ibm.com)[®] are trademarks or registered trademarks of International Business Machines Corp., registered in many jurisdictions worldwide. Other product and service names might be trademarks of IBM or other companies. A current list of IBM trademarks is available on the Web at "Copyright and trademark information" at <http://www.ibm.com/legal/copytrade.shtml>.

Adobe, the Adobe logo, and PostScript are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States, and/or other countries.

Intel, Itanium, and Pentium are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

Java and all Java-based trademarks are trademarks of Sun Microsystems, Inc. in the United States, other countries, or both.

Linux is a registered trademark of Linus Torvalds in the United States, other countries, or both.

Microsoft, Windows, and Windows NT are trademarks of Microsoft Corporation in the United States, other countries, or both.

UNIX is a registered trademark of The Open Group in the United States and other countries.

Other company, product, or service names may be trademarks or service marks of others.

Index

Special characters

- __sJT prefix 4-10
- C prefix 5-7
- cache option 5-4
- compile option 5-5
- compiler-encoding-flag option 5-5
- compiler-executable option 5-5
- compiler-output-file option 5-5
- d option 5-3
- dir option 5-3
- driver option 5-5
- encoding option 5-3
- help option 5-3
- J prefix 5-7
- linemap option 5-3
- offline option 5-5
- online option 5-5, 5-6
- password option 5-5
- props option 5-3, 5-7
- ser2class option 5-5
- status option 5-3
- url option 5-6
- user option 5-6
- version option 5-3
- vm option 5-6
- warn option 5-4
- .class files 1-1
- .ser files 5-1, 5-5, 5-9
- .sqlj file extension 4-2

A

- Accessibility C-1
 - keyboard C-1
 - shortcut keys C-1
- Accessor methods 3-3, 4-1, 4-4

B

- BEGIN DECLARE SECTION statement 4-1
- BEGIN...END block 4-2
- Binding of variables 1-2
- Boolean options 5-7

C

- CLASSPATH environment variable 3-1, 5-1
- close() method 4-6
- Column aliases 4-5
- Command options, ifxsqlj 5-2
- Compiling code 5-1
- Connecting to a database 3-1
- Connection-context class A-2
- Connection-context object A-3
- ConnectionManager class 3-1, 3-4, A-1
- ConnectionManager.java file 3-1
- Curly braces, {} 4-2
- Cursors 3-2, 4-1

D

- Database server names, setting in database URLs A-2
- Database servers 2-1
- Database URLs 3-1, A-1
- Databases, connecting to 3-1
- Default connection context 1-2, 3-2
- Deletes, positioned 4-6
- Demo01.sqlj program B-1
- Demo02.sqlj program B-1
- Demo03.sqlj program 3-3, B-1
- Demo04.sqlj program B-1
- Demo05.sqlj program B-1
- Demo06.sqlj program B-1
- demoUtil.java program A-3
- Disability C-1
- Domain names, setting in database URLs A-2
- Dynamic SQL 4-2

E

- Embedded SQL, traditional 4-1
- END DECLARE SECTION statement 4-1
- endFetch() method 4-6
- Errors 4-10
- ESQL/C 4-1
- EXECUTE FUNCTION statement 4-2, 4-7
- EXECUTE PROCEDURE statement 4-2, 4-7
- Execution context 4-6

F

- FETCH statement 3-3, 4-1, 4-3, 4-4
- file.encoding property 4-9, 5-3
- Files
 - .ser 5-1, 5-5, 5-9
 - ConnectionManager.java 3-1
 - ifxjdbc.jar 5-2
 - ifxsqlj.jar 5-1
 - ifxtools.jar 5-2
 - iterator_name.class 5-1
 - java.properties 4-9
 - profilekeys.class 5-1
 - Property files 5-7
 - SQLChecker.cache 5-4
 - sqlj.properties 5-7
- Functions 4-7

G

- getExecutionContext() method 4-6
- getMaxFieldSize() method 4-7
- getMaxRows() method 4-7
- getQueryTimeout() method 4-7
- getSQLWarnings() method 4-7
- getUpdateCount() method 4-7
- GLS feature 5-3

H

Host variables 3-2, 4-1, 4-3

I

IBM Informix JDBC Driver 1-1, 2-1, A-1
ifxjdbc.jar file 5-2
ifxprofp tool 5-9
ifxsqj command 5-1
ifxsqj.jar file 5-1
ifxtools.jar file 5-2
Informix database servers 2-1
INFORMIXSERVER environment variable A-2
initContext() method 3-1, 3-4, A-1
Internal resource files 5-1
IP addresses, setting in database URLs A-2
isClosed() method 4-6
Iterator objects 3-2, 3-4, 4-1, 4-3
iterator_name.class file 5-1

J

Java compiler 1-1
Java Development Kit (JDK) 2-1
Java interpreter 5-2
Java types 4-7
java.properties file 4-9
JDBC 1-1, 1-2, 4-9, 5-5, 5-6

L

Language character sets 4-9
Latin-1 character set 4-9
Line numbers 5-3

M

main() method 3-4
MultiConnect.sqlj program A-2
Multiple database connections 4-1

N

Name-value pairs of database URLs A-2
Named iterators 3-3, 4-4
native2ascii tool 4-9
newConnection() method A-1
next() method 4-5, 4-6
Nondefault connections A-2
Null data 4-2
Null indicator variables 4-9

O

Off-line checking 5-9
On-line checking 5-8
Online checking 5-5
Output directory 5-3

P

Passwords, setting in database URLs A-2
PATH environment variable 5-5

Port numbers, setting in database URLs A-2
Positional iterators 3-3, 4-3
Positioned updates, deletes 4-6
Preprocessing source code 5-1
profilekeys.class file 5-1
Property files 5-7

R

README file 2-1, B-1
Reserved names 4-10
Result sets 3-2, 4-3
Root output directory 5-3
rowCount() method 4-5
Running Embedded SQLJ programs 5-1

S

Sample programs 2-1, 3-3, B-1
Schema checking 1-2
SELECT statements 3-2
SELECT...AS statement 4-5
SELECT...INTO statement 3-2, 4-3
Semantics checking 1-2, 5-8
Servers 2-1
setMaxFieldSize() method 4-7
setMaxRows() method 4-7
setQueryTimeout() method 4-7
setUpdateCount() method 4-7
Shortcut keys
 keyboard C-1
Specifying environment variables A-2
SPL routines 4-7
SQL statements 3-2
SQL types 4-7
SQL92 Entry level 4-2
SQLChecker.cache file 5-4
SQLException class 4-9
SQLException methods 4-10
SQLJ consortium 1-1
SQLJ runtime package 4-9
SQLJ translator 1-1, 4-10, 5-1
sqlj.properties file 5-7
sqlj.semantics.JdbcChecker class 5-5
sqlj.semantics.OfflineChecker class 5-5
Stored functions 4-7
Syntax checking 1-2, 5-8

T

Translating source code 5-1
Type checking 1-2, 4-4, 4-5
Type mappings 4-7

U

Unicode escape sequences 4-9
Updates, positioned 4-6
User names, setting in database URLs A-2

W

WHENEVER..GOTO/CONTINUE statement 4-1
WHERE CURRENT OF clause 4-6



Printed in USA

SC27-3556-00

